

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

Rec'd PCT/PTO 28 JUN 2004

PCT/SE 02 / 0 2 4 5 7

#2

## Intyg Certificate

REC'D 21 JAN 2003

WIPO

PCT

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.



(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm  
Applicant (s) SE

(21) Patentansökningsnummer 0104442-9  
Patent application number

(86) Ingivningsdatum 2001-12-28  
Date of filing

Stockholm, 2003-01-09

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Gunilla Larsson

Avgift  
Fee

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATORREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

BEST AVAILABLE COPY

Ink. t. Patent- och reg.verket

2001-12- 2 8

1

Huvudfaxen Kassar

P16172SE.A01, BA, 2001-12-27

TITLE

**METHOD FOR MANUFACTURING A COMPONENT AND A COMPONENT**

## 5 TECHNICAL FIELD OF THE INVENTION

The present invention relates to a method for fabricating and assembling a component for electromagnetic waves. The component comprises a substrate provided with a cavity.

## 10 BACKGROUND OF THE INVENTION

The growing use of micro or millimetre frequencies, especially within wireless communications requires low-loss, high Q passive components. One important aspect is the fabrication process of these components, which must be inexpensive and allow batch processing.

15

Filters, for example, are one of the most important components. The prior art cavity filters or other microwave or millimetre wave elements made in micromachined technique appear as they were milled in metal, i.e. they have perpendicular angles in quadratic and square shaped "boxes". These are simple to compute and easy to etch, for example, if low productive dry etching method is used.

20

It is known to etch a [110] silicon substrate by means of fast wet etching methods; however, they follow crystalline structure, which usually are approximately 60 degrees. Some cheap sensors for air bags, for example, are designed in geometrical shapes that suite wet etching. These sensors do not use radio frequencies or cavities but through vibrations they sense motion and they are produced by etching off silicon volumes.

25

Wet etching is a blanket name that covers the removal of material by immersing the wafer in a liquid bath of the chemical etchant. Wet etchants fall into two broad categories: isotropic etchants and anisotropic or preferential etchants.

30

Isotropic etchants attack the material being etched at the same rate in all directions. Anisotropic

Ink. t. Patent- och reg.verket

2001-12- 2 8

Huvudfaxen Kassen

2

etchants attack the silicon wafer at different rates in different directions, and so there is more control of the shapes produced. Some etchants attack silicon at different rates depending on the concentration of the impurities in the silicon (concentration dependent etching).

5 Micromachined filters in which the cavities are attached to a metallic layer and the "cap" of the filter having slot connection made through conventional circuit board manufacturing technique is described in "A high performance K-Band diplexer using high-Q micromachined cavities", Michael J. Hill et al, department of Electrical and Computer Engineering, University of Arizona, Tucson, AZ 85721-0104. According to this paper, which is directed at microwave  
10 diplexers two high Q cavity resonators, a Duroid-based high performance diplexer has been designed, fabricated and measured. This diplexer shows transmit/receive bandwidths of 2.39% and 1.8% and insertion losses of 2.38dB and 2.89dB, respectively. Channel centre frequencies of 18.8GHz and 20.7GHz provide a channel separation of approximately 9% and channel-to-channel isolation greater than 24dB. Utilizing machined aluminium cavities and a Duroid  
15 substrate the diplexer design provides insight into cavity based diplexer construction, allowing for the design of a silicon based micromachined cavity diplexer. Simulation results from this silicon-based diplexer are also presented. One disadvantage with machined filters in Duroid-based technique is not being suitable for low cost batch production. In addition large tolerances do not allow fabrication of filters with desired performances.

20 Cavities having inclined walls are known through "A Finite Ground Coplanar Line-To-Silicon Micromachined Waveguide Transition", James P. Becker et al, IEEE Transactions on Microwave Theory and Techniques, Vol. 49, No. 10 October 2001. A channel is etched through a wet anisotropic etching. The channel has a triangular cross-section. Thus, this document  
25 concerns another planar etching technique, intended for high frequency applications.

#### SUMMARY OF THE INVENTION

30 The main object of the present invention is to provide a microwave or millimetre wave element, such as a wave guide, resonator, filter, diplexer or the like having a substrate made through removal of material by immersing the wafer in a liquid bath of the chemical etchant or wet etching, which is a much cost effective process than dry etching.

Ink. t. Patent- och reg.verket

2001-12-28

3

Huvudfaxen Kassar

Another object of the present invention is to provide a filter arrangement, which is suitable for silicon etched large-scale production. Another object of the present invention is to provide a cost effective high performance filter for commercial radio equipment, such as Bluetooth, mobile radio communicators, base station antennas etc., and especially for high frequency applications.

Thus, the invention presents a method for fabricating a cavity on a substrate for a component for electromagnetic waves. The method comprises providing said cavity by removal of material from said substrate by removal of material by immersing the substrate in a liquid bath of a chemical etchant, so that resultant cavity has a top and a bottom side and sidewalls, and said cavity at one of said top and/or bottom sides exhibits an at least a four sided opening having at least two different adjacent angles. According to one embodiment, the component further comprises a conductive layer arranged as a ground plane covering said substrate, said ground plane being provided with at least one coupling slot and at least one conductor. The ground plane is connected to a component element, which is inserted into said cavity in said substrate. Preferably, the substrate is made of [110] silicon. The component is one of a filter, diplexer, resonators or matching networks. Preferably, the substrate is etched from both sides.

The invention also relates to a component for electromagnetic waves. The component comprises a substrate provided with a cavity being produced by removal of material from said substrate by immersing the substrate in a liquid bath of a chemical etchant. The cavity has a top and a bottom side and sidewalls and at one of said top and/or bottom sides exhibits an at least a four sided opening having at least two different adjacent angles. The component further comprises a conductive layer arranged as a ground plane covering said substrate. The ground plane is provided with at least one coupling slot and at least one conductor. The ground plane is connected to a component element, which is inserted into said cavity in the substrate. Most preferably, the substrate is made of [110] silicon. The component is one of a filter, diplexer, resonators or matching networks. The conductive plane is made of a metallic layer. According to one aspect of the invention, the cavity is arranged in a resonator arrangement with coplanar waveguide (CPW) couplings, comprising said substrate with micromachined through cavity with electroplated surface. Preferably, the cavity is made through preferential etching from the

Ink. t. Patent- och reg.verket

2001 -12- 2 8

Huvudfaxen Kassan

4

both sides of the substrate, having said sidewalls perpendicular to the surfaces of the cavity. In one embodiment the substrate is enclosed within a housing of dielectric material. The cavity has a length, said length  $n\lambda$ , where  $n = 1, 2, \dots$ , wherein  $\lambda$  is the wavelength.

- 5 Preferably, microstrips are arranged on a cap. The component is provided with low CPW or Coplanar Strip (CPS) waveguide input and output-coupling networks.

Preferably, the cavity is rhombus shaped while, end sections of said strips are angularly arranged relative cavity edges. In one embodiment, the end sections of the strips follow cavity edges, i.e. they have same angle as the cavity edges.

# BRIEF DESCRIPTION OF THE DRAWINGS

15 In the following, the invention will be further described in a non-limiting way under reference to the accompanying drawings in which:

Fig. 1a schematically illustrates a top view of a substrate fabricated according to the invention,

Fig. 1b is a cross section through the encircled section in Fig. 1,

20 Fig. 2 schematically illustrates a top view of a substrate fabricated according to the invention,

Fig. 3 is a cross section along line II-II in Fig. 2,

Fig. 4 is a perspective view of substrate in the component according to Fig. 2,

Fig. 5a is a cross-section through a cavity resonator arrangement according to the invention,

25 Fig. 5b is a cross-section through a cavity resonator arrangement according to another aspect of the invention,

Fig. 6a is a perspective exploded view of a cavity resonator arrangement,

Fig. 6b is a perspective view of an assembled cavity resonator arrangement in Fig. 6a,

Fig. 7a is a perspective exploded view of a cavity resonator arrangement, according to another embodiment

30 Fig. 7b is a perspective view of an assembled cavity resonator arrangement in Fig 7a,

Figs. 8-10 illustrate exemplary coupling-network orientations for cavity resonator arrangements

Ink. t. Patent- och reg.verket

2001-12-28

Huvudfaxen Kassar

5

according to the invention.

# DETAILED DESCRIPTION OF THE EMBODIMENT

5 According to the invention, a microwave filter or similar component is formed in cavities, which are adapted to the geometries that are shaped through wet an-isotropic (preferential) etching of silicon wafers. The filter is buried inside a substrate, parts of which constitute the walls of the filter. Fig. 1a illustrates a top view of the result of the wet etching in a silicon wafer 10. The cavity 11 does not exhibit a rectangular shape, rather a rhombic shape, the corners of which can have the approximated angles of  $\alpha \approx 70^\circ$  and  $\beta \approx 109^\circ$ . As illustrated in Fig. 1b, also the corners of the cavity 11 are inclined and exhibit angles  $\sigma \approx 125^\circ$  and  $\phi \approx 125^\circ$ . For [110] orientation of silicon and angles of cavity in horizontal plane, the speed of the etching process is much faster and the cavities with walls normal to the wafer are formed. The etching is conducted from the horizontal plane (with respect to the plane of the drawing) using
15 preferential etching orientation.

Fig. 2 is a top view of a filter arrangement 20 according to the invention and Fig. 3 is a cross-sectional view along line II-II. The filter is disclosed as an exemplary component and the method of the invention can be used to manufacture other similar components. The dashed line
20 21 illustrates the buried filter boundary in a cavity. The cavity is substantially rhomb shaped, i.e. a square in which the two adjacent corners  $a$  and  $b$ , seen from above, have different angles. The cap 22 comprises a metallic material layer or conductive plane constituting a ground plane. Two coupling microstrips, 23 and 24 extend over coupling slots 26 and 27, respectively. One microstrip and coupling slot combination, e.g. 23 and 26, acts as an input and the other
25 microstrip and coupling slot combination, e.g. 24 and 27, acts as an output. The length of the input and output coupling strips 23, 24 over the cavity is at least  $\lambda/4$  over the cavity, wherein  $\lambda$  is the wavelength of the microwave. As can be seen in Fig. 2, the microstrips are arranged above a dielectric layer 28.

30 The substrate 30, as illustrated in Figs. 2 and 3, is provided with a cavity 31, into which the filter is lowered. Due to the effects of the wet etching process, also the walls 32 of the cavity exhibit inclination, angle of which can be as much as 60 degrees. However, this will not affect

Ink t. Patent- och reg.verket

2001-12-28

Huvudfaxen Kassan

6

the performance of the filter. The cavities constituting filter chambers 20 can be inter-connected through passages 33, as shown in the perspective view of Fig. 4. Also, the angles  $\rho$  and  $\xi$  between the walls may be non-perpendicular,  $\rho = 109^\circ$  and  $\xi = 70^\circ$ .

5 The fabrication steps, thus, comprise:

- Providing a conductive plane
- Arranging the conductive plane with coupling openings through milling etc
- Providing a microwave element on a first surface of said conductive plane
- Providing a dielectric layer on a second surface of said conductive plane
- 10 - Arranging microwave conductors on the dielectric layer
- Providing a silicon wafer with [110] orientation
- Exposing selected areas on said silicon plate to wet etching until cavities of desired depth are produced, and
- Covering (electroplating) the etched surfaces by a conductor (e.g. made of Cu, Au, etc.)
- 15 - Attaching said conductive plate to said silicon plate, e.g. by means of anodic bonding.

Above example relates to a multichip module. It is also possible to provide a cavity etched through the substrate. Figs. 5a, 6a and 6b illustrate a cavity resonator arrangement 50 with coplanar waveguide (CPW) couplings, comprising a substrate 501 with micromachined through cavity 51 with electroplated surface 59. Fig. 6a is an exploded view in perspective and Fig. 6b illustrates the assembled resonator arrangement 50. The substrate 501 consists of silicon and the conductive layer 59 may consist of copper (Cu), silver (Ag) or any other suitable conductive material. The cavity is made through preferential etching from the both sides of the substrate. In this case the walls of the cavity are perpendicular to the surfaces of the cavity. The substrate is enclosed within a housing 502 of dielectric material. The microstrips 53 and 54 are arranged on the top layer or the cap 52.

30 Fig. 5b illustrates a silicon plate 50b micromachined through from both sides, i.e. both from top and bottom surfaces. The surfaces are electroplated 59b. The preferential etching is done with similar masks from both sides, thus, resulting in same etching shapes. In this case the walls of

Ink. t. Pate reg.verket

2001-12- 2 8

Huvudfaxen Kassan

7

the cavity 51b are substantially perpendicular to the surface of the cavity.

The output and input coupling networks are CPW. In the prior art filters, the input and output coupling microstrip lines are usually at least  $\lambda/4$  ( $\lambda$ = wavelength of the microwave signal) long over the cavity. To be able to provide input and output coupling sections electromagnetically isolated, the length of the cavity must be  $n\lambda$ , where  $n = 1, 2, \dots$ . This makes the length of the cavity much longer than a minimum possible value  $\lambda/2$ .

To keep the size of the cavity and the manufacturing costs low CPW or Coplanar Strip (CPS) waveguide input and output-coupling networks can be used. The perspective views of Figs. 7a and 7b illustrate an embodiment having CPS. Fig. 7a is an exploded view and Fig. 7b is an assembled resonator arrangement 70.

In contrast to the microstrip coupling, the maximum of the current, i.e. generating the magnetic field H (Figs. 6a and 7a) is generated at the ends of the short circuit CPW and CPS. The magnetic field lines are well matched with the input and output walls of the cavity, and for this reason the total length of the cavity is not limited by the coupling networks, which is the case with the microstrip. The minimum possible length may extend to  $\lambda/2$ .

In Figs. 8 to 10 some exemplary possible coupling-network orientations are illustrated. The dashed line 81 corresponds to the edges of the cavity in filter arrangements 80a-80c. The coupling strips are denoted with 83a-83c for inputs and 84a, 84c for outputs.

In Fig. 8, the cavity is rhombus shaped while, the end section of the strips are angularly arranged relative the cavity edges. In Fig. 9, the end sections of the strips follow the cavity edges, i.e. they have same angle as the cavity edges.

In Fig. 10, stubs S2 and S3 are used for adjustment of the coupling strength of the input and output CPW with the cavity and for the matching with the impedance of input/output CPW, i.e. for reduction of the reflections from the cavity. This is achieved by optimising the dimensions L1, L2, L3, W2, S2 and S3.



Ink. t. Patent- och reg.verket

2001-12-28

Huvudfaxen Kasse

8

Additional adjustment of the coupling strength and minimization of the reflection losses is achieved by determining the dielectric constant and the thickness of the CPW substrate and the width and length of the slot in the ground plane of the CPW, i.e. the cover of the cavity at the same time.

5

The filter according to the invention can be used as a high performance filter in commercial radio and telecommunication equipment, such as Bluetooth and mobile telephones, suitably but not exclusively operating over 40 GHz. Moreover, the component according to the invention can be used as a diplexer, resonator or matching network.

10

The invention is not limited the shown embodiments but can be varied in a number of ways without departing from the scope of the appended claims and the arrangement and the method can be implemented in various ways depending on application, functional units, needs and requirements etc.

0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
0  
1  
2  
3  
4  
5  
6  
7  
8  
9  
0

Ink. t. Patent- och reg.verket

9

2001-12-28

# CLAIMS

Huvudfaxen Kesson

1. A method for fabricating a cavity (11, 21, 51) in substrate (10, 30, 501) for a component for electromagnetic waves, the method comprising providing said cavity by removal of material from said substrate by removal of material by immersing the substrate in a liquid bath of a chemical etchant, so that resultant cavity has a top and a bottom side and sidewalls, and said cavity at one of said top and/or bottom sides exhibits an at least a four sided opening having at least two different adjacent angles.

2. The method of claim 1, wherein said component further comprises a conductive layer arranged as a ground plane (12) covering said substrate, said ground plane being provided with at least one coupling slot (16, 17) and at least one conductor (13, 14), said ground plane being connected to a component element (11), which is inserted into said cavity (21) in said substrate.

3. Method of claim 1, characterised in that said substrate is made of [110] silicon.

4. Method according to one of claims 1 to 3, characterised in that said component is one of a filter, diplexer, resonator or matching network.

5. Method according to one of claims 1 to 4, characterised in that said substrate is etched from both sides.

6. A component for electromagnetic waves, said component comprising a substrate (10, 30, 501) provided with a cavity (11, 21, 51) being produced by removal of material from said substrate by immersing the substrate in a liquid bath of a chemical etchant, said cavity having a top and a bottom side and sidewalls, characterised in

Ink. t. Pat. och reg.verket

2001-12-28

Huvudfaxen Kassar

10

that said cavity at one of said top and/or bottom sides exhibits an at least a four sided opening having at least two different adjacent angles.

7. The component of claim 6,  
5 characterised in  
that said component further comprises a conductive layer arranged as a ground plane (12) covering said substrate, said ground plane being provided with at least one coupling slot (16, 17) and at least one conductor (13, 14), said ground plane being connected to a component element (11), which is inserted into said cavity (21) in said substrate.  
10
8. The component of claim 6 or 7,  
characterised in  
that said substrate is made of [110] silicon.
- 15 9. The component according to one of claims 6 to 8,  
characterised in  
that said component is one of a filter, diplexer, resonators or matching networks.
10. The component of claim 7,  
20 characterised in  
that said conductive plane is made of a metallic layer.
11. The component of claim 6,  
characterised in  
25 that said cavity is arranged in a resonator arrangement (50) with coplanar waveguide (CPW) couplings, comprising said substrate (501) with micromachined through cavity (51) with electroplated surface (59).
12. The component according to one of claims 6 to 11,  
30 characterised in  
that said cavity is made through preferential etching from the both sides of the substrate, having said sidewalls perpendicular to the surfaces of the cavity.

Ink t. Patent- och reg.verket

2001 -12- 2 8

11

Huvudfaxen Kassar

13. The component of claim 6,

characterised in

that said substrate is enclosed within a housing (502) of dielectric material.

5

14. The component of claim 10,

characterised in

that microstrips (53, 54) are arranged on a cap (52).

10 15. The component according to one of claims 7 to 15,

characterised in

that said cavity has a length, said length  $n\lambda$ , where  $n = 1, 2, \dots$ , wherein  $\lambda$  is the wavelength.

16. The component of claim 11,

15

characterised in

that the components is provided with low CPW or Coplanar Strip (CPS) waveguide input and output-coupling networks.

17. The component of claim 14,

20

characterised in

that the cavity is rhombus shaped while end sections of said strips are angularly arranged relative cavity edges.

18. The component of claim 14,

25

characterised in

that end sections of the strips follow cavity edges, i.e. they have same angle as the cavity edges.

19. A method of fabricating a component according to claim 8, comprising the steps of:

30

- providing a conductive plane,
- arranging the conductive plane with coupling openings through milling,
- providing a microwave element on a first surface of said conductive plane,

Ink. t. Patent- och reg.verket

2001 -12- 2 8

Huvudfaxen Kassan

12

5

- providing a dielectric layer on a second surface of said conductive plane,
- arranging microwave conductors on the dielectric layer,
- providing a silicon wafer with [110] orientation
- exposing selected areas on said silicon plate to wet etching until cavities of desired depth are produced,
- covering (electroplating) the etched surfaces by a conductor, and
- attaching said conductive plate to said silicon plate, e.g. by means of anodic bonding.




Ink. t. Patent- och reg.verket


2001-12-28

**Huyudfaxen Kassen**

1/6

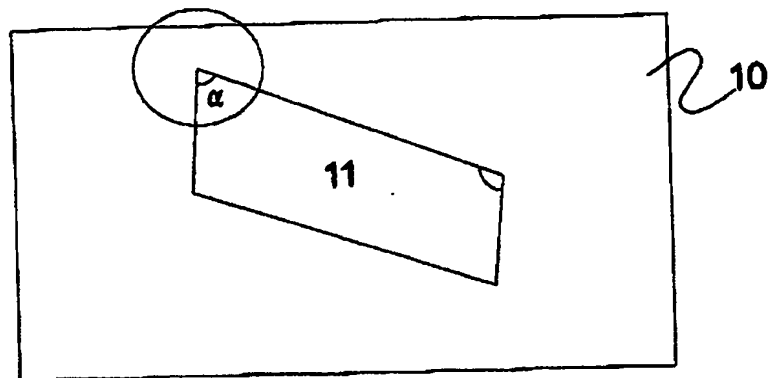

**Fig. 1a**



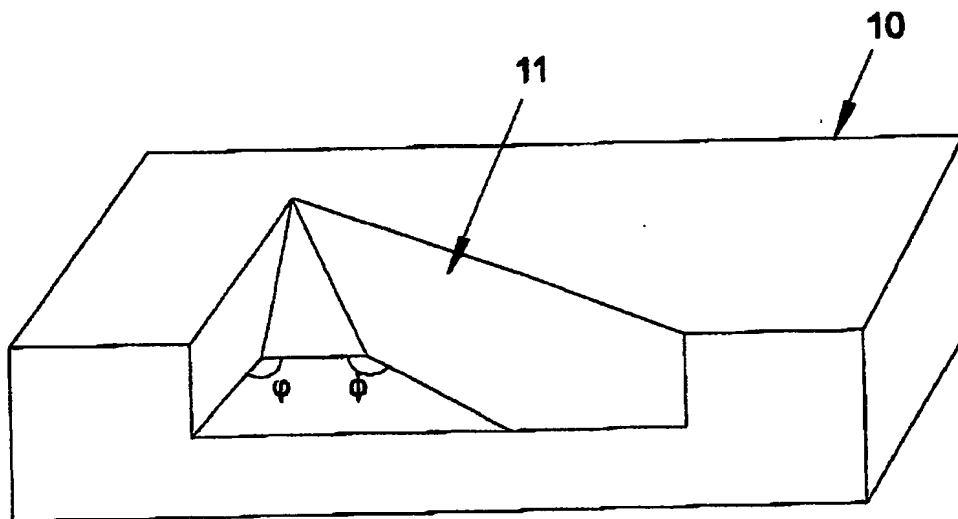


**Fig. 1b**

Ink. i Patent- och reg.verket

2001-12- 2 8

2/6

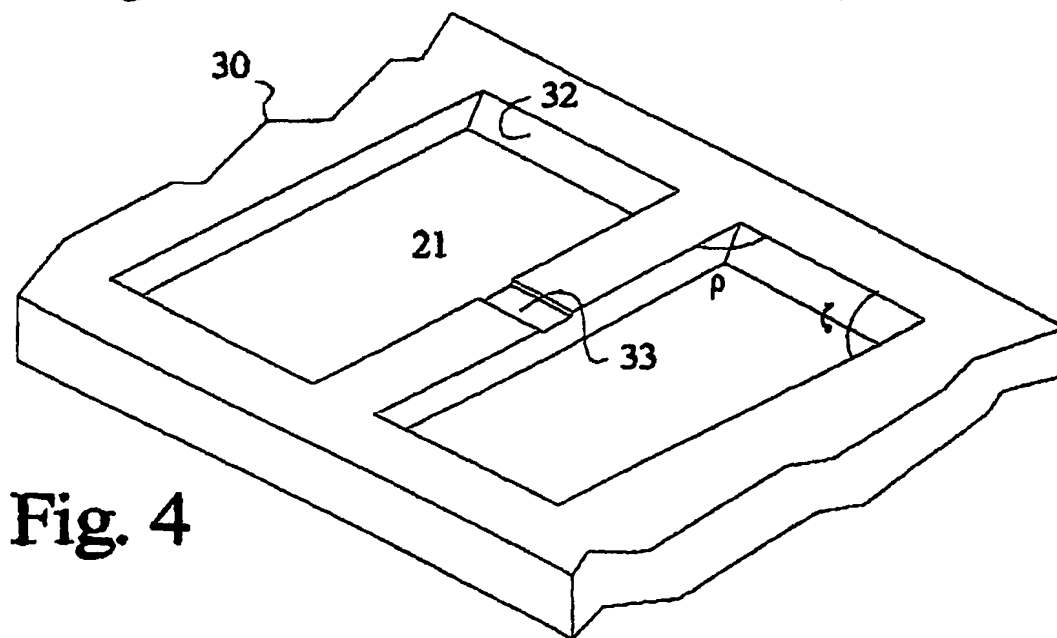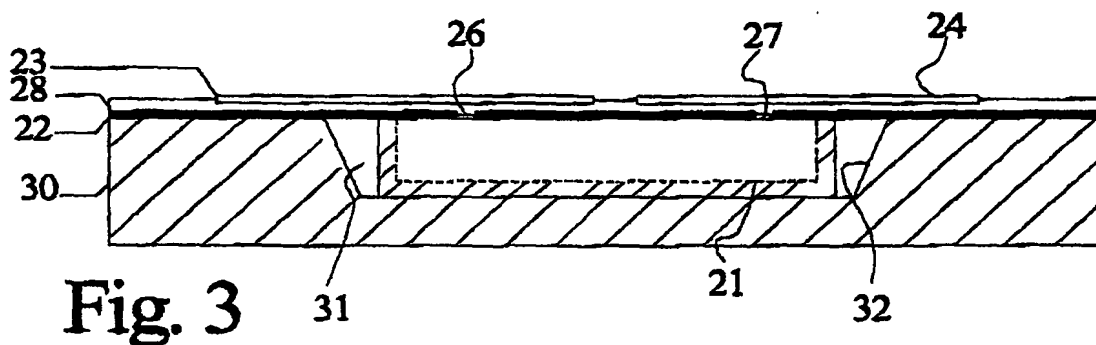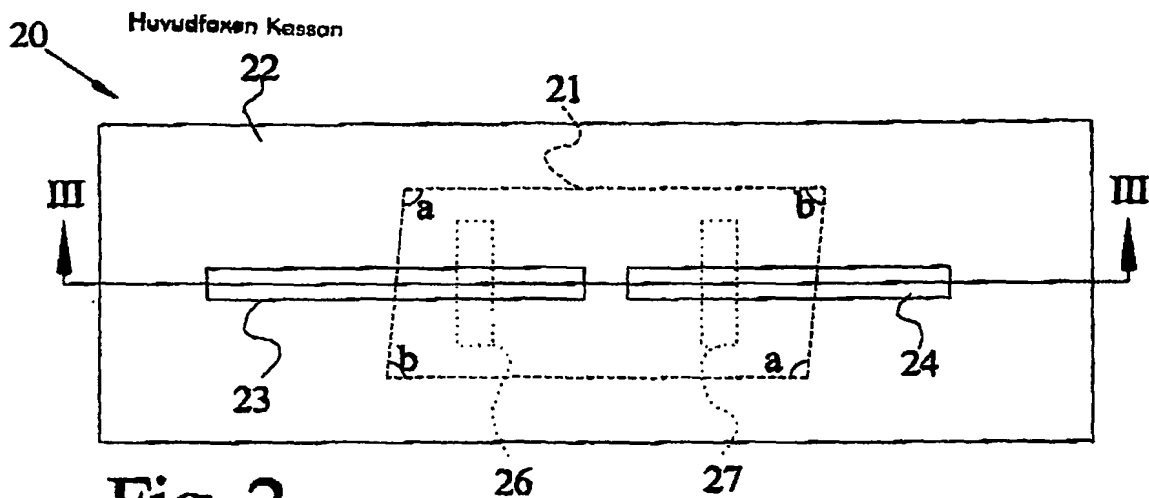




Ink. t. Patent- och reg.verket 3/6

2001-12-28

**Huyudfaxen Kassen**

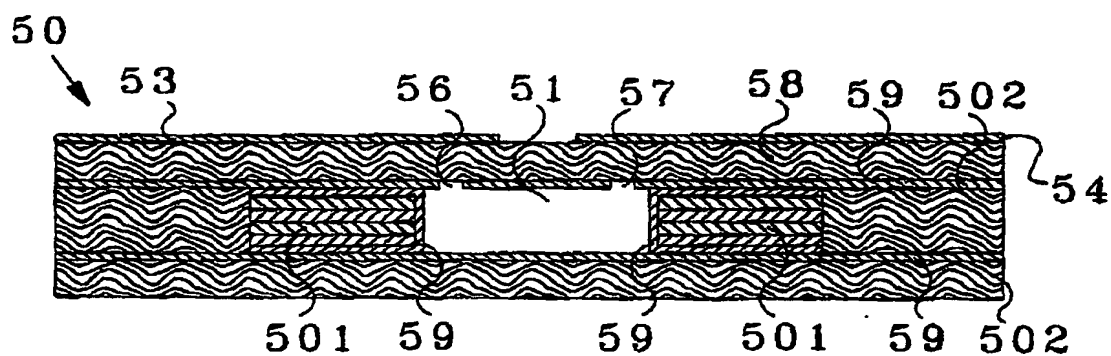

**FIG. 5 a**

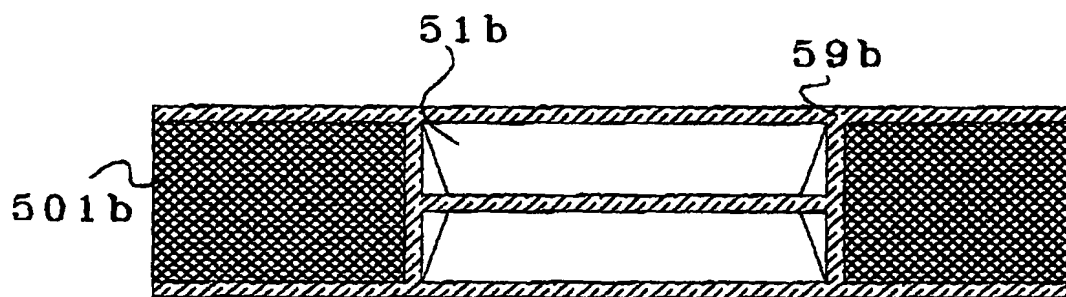


FIG. 5b

Ink. t. Patent- och reg.verket

4/6

2001-12-28

Huvudfaxen Kassar

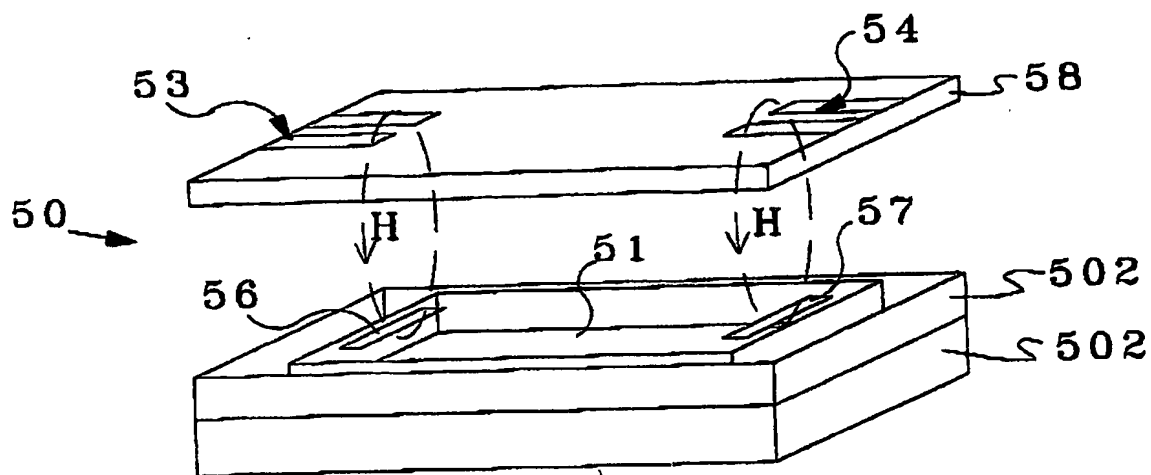


FIG. 6 a

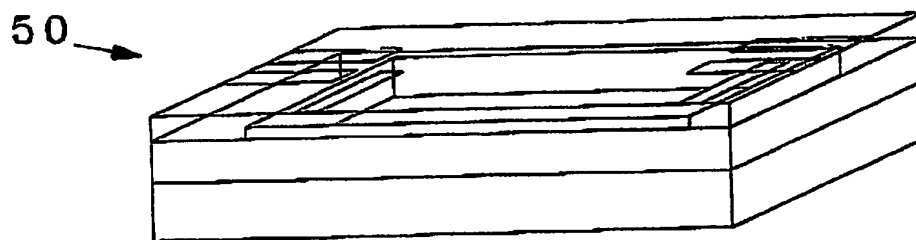


FIG. 6 b

Ink. t. Patent- och reg.verket

2001-12-28

5/6

Huvudfaxen Kassan

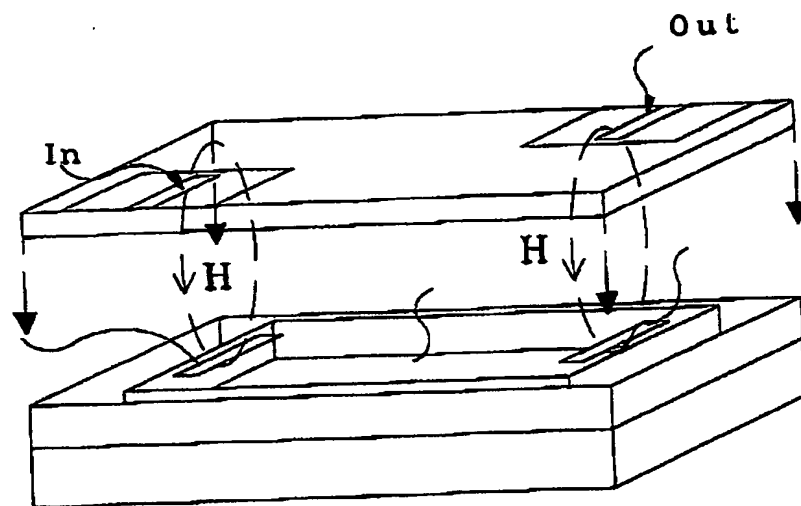


FIG. 7 a

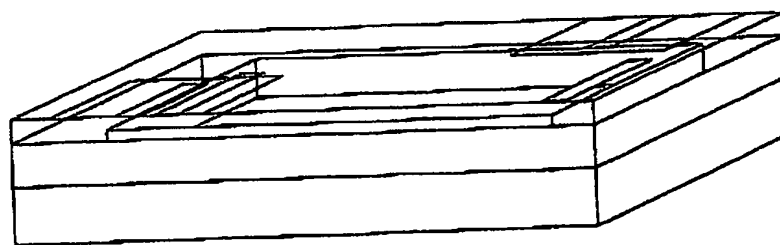


FIG. 7 b

70

9  
8  
7  
6  
5  
4  
3  
2  
1

Ink. t. Patent- och ren.verket

2001-12-28

6/6

Huvudfaxen Kassan

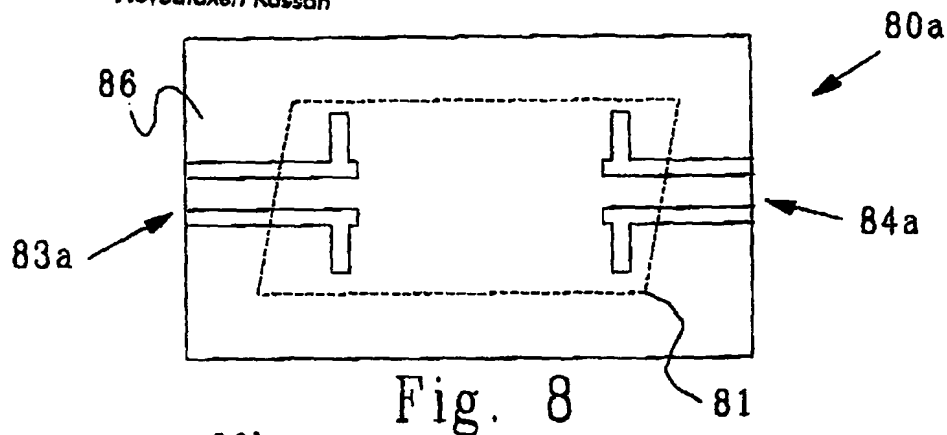


Fig. 8

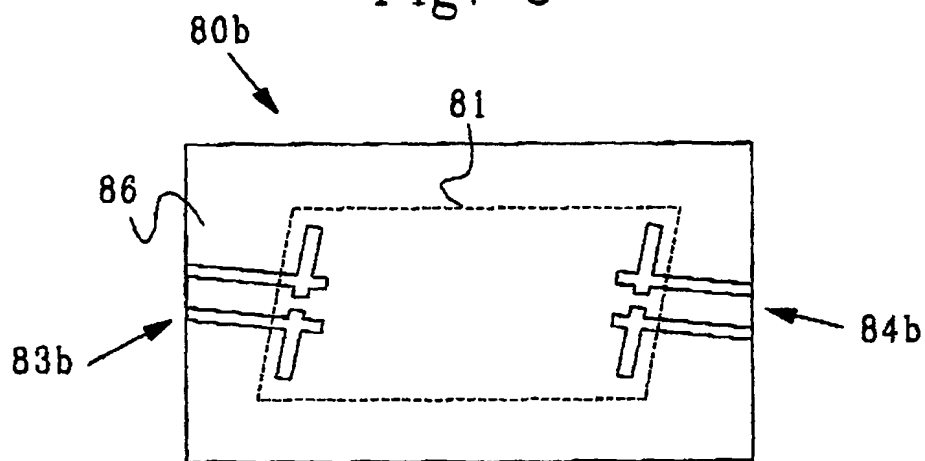


Fig. 9

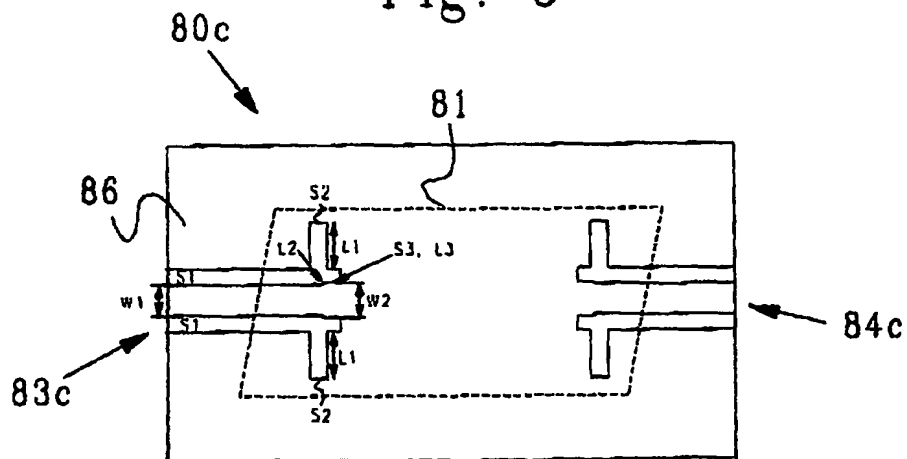


Fig. 10

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**